

Ambre 200



Shower Cradle

The top of the mesh can be released by undoing the tension adjustable straps at the rear to allow optimum access for hair washing

Detachable sides panels provide additional security for the client

A quick release mesh for ease of laundry or replacement

Powder coated tubular stainless steel frame

Aperture available in small, medium and large

Heavy duty castor with easy to use brake, made from high grade materials

Designed to assist disabled people and carers in their everyday needs



The Ambre 200 Shower Cradle is designed to offer a reclined sitting position allowing use in a level access shower area or where limited space is available while ensuring that the client is comfortable and secure.

Features of this range include tension adjustable mesh for ease of laundry or replacement. The top of the mesh can be released by undoing the straps at the rear to allow optimum access for hair washing. The sides of the mesh along the frame are padded to maximize comfort.

Construction

- Tubular stainless steel material ensuring robust construction.
- Anti-bacterial powder coating which does not degrade effectiveness over time.
- Castors tested to 100 hours salt spray test.
- Upholstery is hard wearing easy clean and meets current legislations regarding fire retardant upholstery.
- SO:9001:2015 Accreditation.

Technical Data

No specialist cleaning required due to our BacAway anti-bacterial powder coating, just use a proprietary cleaning solution

Maximum overall Length - 1225mm

Overall Width - 618mm

Overall height - 1215mm

Small Cradle weight - 11kg

Medium Cradle Weight - 11.5kg

Large Cradle Weight - 12kg

Extra Large Cradle Weight - 12.5kg

OPTIONAL ACCESSORIES



■ Washing Apertures




■ Head Rest



■ Velcro Rolls / Support Rolls

Ambre 200 – Shower Cradle Standard Sizing Matrix

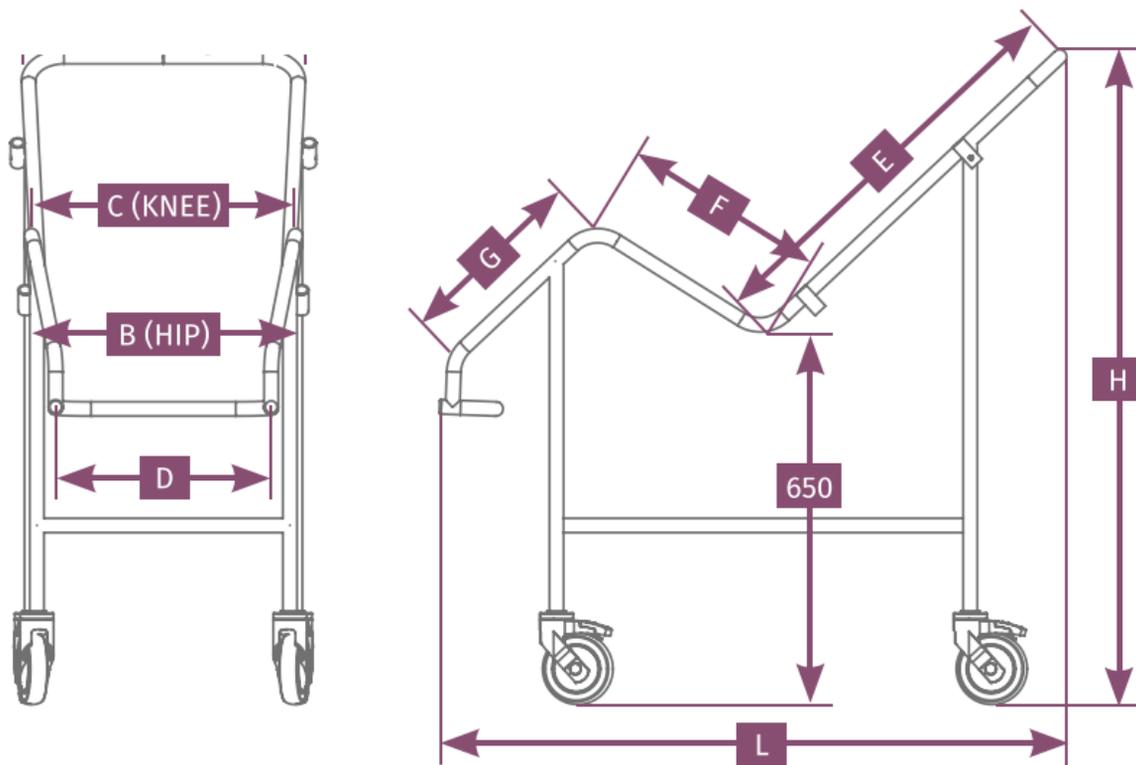

Dimension	Small	Medium	Large	X Large
A	505mm	505mm	580mm	618mm
B	455mm	455mm	505mm	543mm
C	495mm	495mm	545mm	583mm
D	405mm	405mm	405mm	405mm
E	612mm	712mm	812mm	812mm
F	305mm	355mm	405mm	405mm
G	260mm	335mm	335mm	335mm
H	1080mm	1150mm	1215mm	1215mm
L	935mm	1105mm	1225mm	1225mm